CCE SERIES

PRIMARY DEMOLITION CRUSHER
PINZA DA DEMOLIZIONE PRIMARIA
PINCE À BÉTON
ABBRUCHZANGE
PINZA DE DEMOLICIÓN




- **BUILT IN HARDOX AND STRENX**
  COSTRUITO IN HARDOX E STRENX
- **INTERCHANGEABLE TEETH**
  DENTI INTECAMBIABILI
- **HIGH CLAMPING FORCCE ON THE TIP/TEETH**
  ALTISSIMA FORZA CONCENTRATA SULLE PUNTE/DENTI
- **SPEED VALVE**
  VALVOLA DI VELOCITÀ

Primary demolition is defined as a complex of works aimed at breaking down constructions and removing their materials. With CC hydraulic crushers, the primary demolition of concrete structures will be completed best.

Per demolizione primaria si intende un complesso di lavori volti a demolire le costruzioni e a rimuoverne i materiali. Con le pinze idrauliche CC, la demolizione primaria di strutture in cemento armato verrà portata al termine nel migliore dei modi.

- Fully protected cylinders
- Hardened pins and bushings
- Reversible blades
- 360° hydraulic rotation

- Cilindri totalmente protetti
- Perni e boccole temprati
- Lame reversibili
- Rotazione idraulica a 360°

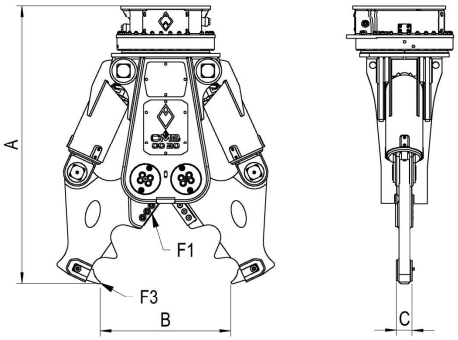

*Model without interchangeable teeth
*Modello senza denti intercambiabili

CCE series		*CC03E	CC05E	CC10E	CC15E	CC20E	CC25E	CC40E	* CC60E
ATTACHMENT WEIGHT	kg	275	560	1050	1590	2030	2970	3750	6450
EXCAVATOR WEIGHT	ton	3-5	6-9	10-15	16-21	22-28	28-40	36-49	63-85
A	mm	1100	1290	1580	1920	2005	2300	2620	2920
B	mm	415	510	710	840	965	1100	1250	1670
C	mm	30	95	120	120	120	150	150	100
BLADE	mm	120	160	200	220	250	300	320	350
F1	ton	77	100	120	185	300	320	430	660
F3	ton	25	30	45	65	80	85	100	160
Ø MAX	mm	20	20	25	30	40	40	50	50
EXCAVATOR WORKING PRESSURE	bar	250	300	350	350	350	350	350	350
EXCAVATOR OIL FLOW	l/min	40/60	80/120	150/200	150/200	200/300	250/350	300/400	350/450
ROTATION WORKING PRESSURE	bar	120	120	120	120	120	120	140	140
ROTATION OIL FLOW	l/min	4	5	10	15	15	20	30	40
TANK		✓	✓	✓	✓	✓	✓	✓	✓
SPEED VALVE		OPT	OPT	OPT	OPT	✓	✓	✓	✓

Attachment-excavator couplings data are for information only, always check load diagram of the machine.
I dati relativi agli accoppiamenti attrezzatura escavatore sono da considerarsi puramente indicativi, controllare sempre i diagrammi di carico della macchina operatrice


VOLVO
VOLVO
ARAG
EC380E


MECALAC
TC MainSERVICE
MCR

